POSzeo **Product Datasheet**

DP-S12 Customer Facing POS Terminal

DP-S12 Customer Facing POS Terminal with 15.6/11.6 Dual POS and Windows POS Touch Screen

Dual Display
15.6 inch+VFD/11.6 inch

Windows 10
Windows 7

Intel Core I3
Intel Core I5

Compact Countertop Design

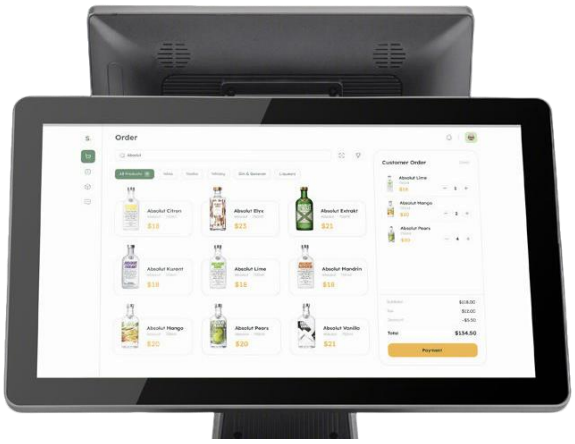

15.6-inch Touch Experience

VFD /11.6 inch Customer Display

Adjustable angle

Compact Countertop Design

Convenience Store Checkout

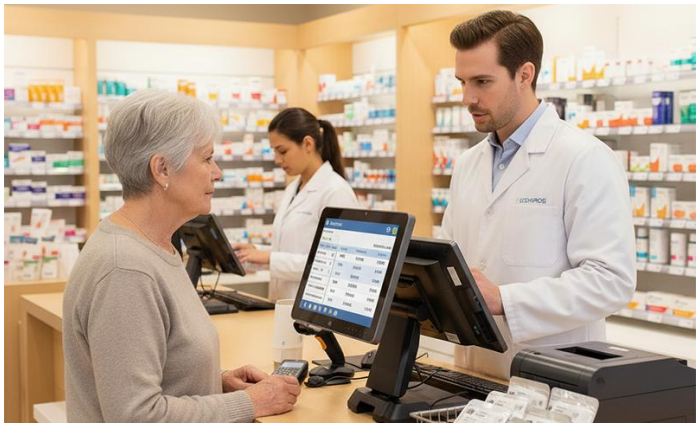

Pharmacy Billing & Pickup

QSR Counter Touch POS

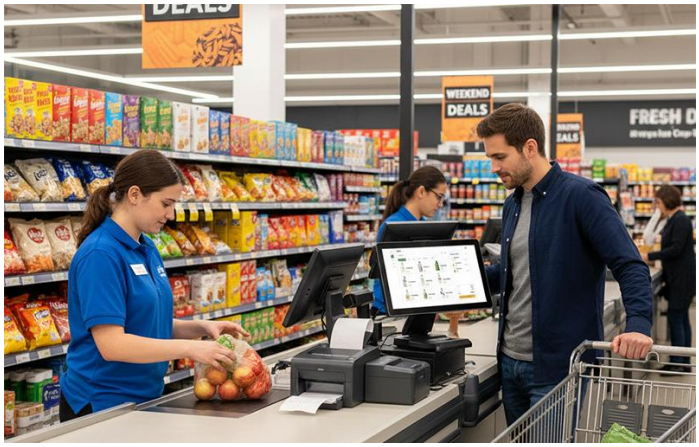

Supermarket Dual Screen POS

Main Feature

◆ **Customer-Facing Dual Screens：** 15.6" + 11.6" displays confirm orders, promote offers, and reduce receipt disputes.

◆ **Windows POS Touch Screen：** Familiar UI speeds onboarding and supports mainstream retail applications.

◆ **Retail Dual Screen Register：** Compact footprint keeps counters tidy during peak traffic in QSR and supermarkets.

◆ **Flexible Performance Options：** Intel i3/i5/i7 with 4–16GB RAM and SSD up to 512GB.

◆ **Rich Retail I/O：** 1×VGA, 2×COM, 6×USB, 1×RJ45, 2×audio connect drawers, scanners, printers.

◆ **Transparent Customer Display：** Real- time basket and pricing visibility builds trust and reduces returns.

◆ **Peripheral Ecosystem Ready：** Integrates payment terminals, labelers, and kitchen or receipt printers.

◆ **Optional Wireless & Audio：** WiFi/BT and speakers support flexible placement and audible prompts.

◆ **Chain- Wide Consistency：** Standard Windows stack simplifies deployment, updates, and support.

◆ **Entry- Tier TCO Focus：** Durable build and simple maintenance help control ownership costs.

Technical Specifications

Item	Specification
Processor / CPU	Intel® i3/i5 (retail class)
Operating System	Windows 7/10 (Windows 11 IoT optional by project)
Memory & Storage	4–16GB RAM, SSD up to 512GB
Main Display	15.6" capacitive touchscreen (operator display)
Customer Display (Optional)	LED8N (VFD:Optional)/11.6 inch optional
I/O Ports	1×VGA, 2×COM, 6×USB, RJ45
Networking	Gigabit Ethernet; optional Wi-Fi/Bluetooth via adapter
Power	AC 100–240V adapter → DC 12V input
Environmental	Operating 0°C–40°C; Storage –20°C–60°C; 10%–90% RH non-condensing; ESD/Shock: TBD
Recommended Accessories	Bluetooth; VFD /11.6 inch customer display
Dimensions & Weight	39*24.5*32cm G.W.:5.5kg

I/O Layout (Reference)

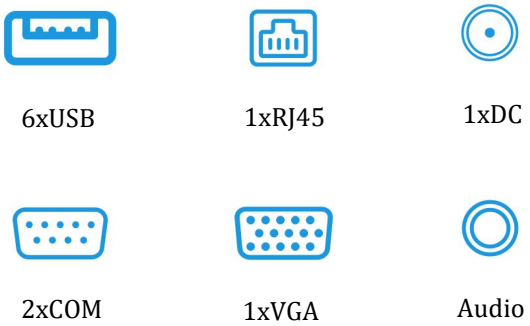

Compliance & Safety

- CE, FCC, RoHS (final configuration dependent)
- Power supply with over-voltage and over-current protection
- K-lock slot support (chassis dependent)

Manageability & Security

- Remote maintenance via standard Windows tools (RDP, MSI/Silent install)
- BIOS/OS password policies; user role separation
- Cable-management path for clean in-store install

Package Contents & Support

- Main unit, power adapter, power cable, quick start guide
- 12 months standard; 24/36 months extended (optional)
- Support: https://www.poszeo.com/service/support/

Contact & Next Steps

- Explore Products: poszeo.com/products
- Request a Quote: poszeo.com/contact-us
- Email:sales@poszeo.com
- Phone/Whats App: +86 198 6074 3416

Document Control

- Doc: DP-S12 | Rev: v1.2 | Date: 2025-11-06
- Notes: Specifications may change without notice; options & certifications depend on final configuration and region.

Poszeo.com ©2025-2026 All Right Reserved